IMPROVED TOY GUN.

The annexed engraving represents a novel device which may be utilized to "teach the young idea how to shoot," or, in other words, placed in the hands of children as a plaything, or may be employed to kill rats or birds or any other small game. It consists of a gun constructed after the well known pea-shooter plan, that is, the missile is thrown by the contraction of a released elastic band, to moderate distances, with accuracy and considerable force. A general view of the invention is shown in Fig. 1; Fig. 2 shows the trigger mech- petroleum product; but in England and France both are ing a uniform thickness and even surface, giving the same anism, and Fig. 3, a section the muzzle.

The barrel is slotted longitudinally, the slots forming guides for the sliding piece, A, therein. Extended between stationary hooks, B, at the muzzle, Fig. 3, and the arms of piece, A, which protrude through the slots, are strong rubber springs, C. These are extended when the slide piece is retracted.

The rear portion of the slide piece is provided with a hook or arrow, which catches in the pivoted spring jaws, D, Fig. 2. A slotted piece, E, with V-shaped front end, slides on lateral guide pins and acts on the rear ends of said jaws. The trigger engages in a recess of slide, E, and carries the same forward on being pulled. The rear arms of the spring jaws, otherwise held apart

by a rubber spring encircling the front arms, are thereby known as benzine. The former is much more valuable than which hold the board after it is planed. These are also forced together, and the front part opened. The rear of the slide piece, A, is thus released, and the latter is pulled quick. ly forward by the contraction of the bands, thus throwing the missile out of the barrel. Elastic cushions, F, Fig. 3, arranged in the ends of the barrel slots, break the force of the shock of the slide as it reaches the muzzle.

On pulling back the slide piece for the next shot, the arrow end spreads the jaws, which carry, by their action on the V-

other discharge. Buckshot or bullets may be fired; and to retain the same in place, the forward end of the slide piece, A, is hollowed, and a light spring provided, which grasps the ball and prevents its escaping when the gun is carried muzzle downward.

For dispelling cats in city backyards, we should imagine this invention admirably a apted. It certainly would be a cheap substitute for the air guns now used for target practice. It may also be trusted in the hands of children, to whom it would be dangerous to allow the handling of a weapon charged with powder and ball.

Patented through the Scientific American Patent Agency, May 25, 1875. For further information, relative to sale of patent, address the in-

Burnt Ordinary, James City county, Va.; after that date, at Mobile, Ala.

IMPROVED FLOOR CLAMP.


quently necessary to clamp flooring boards or portions of fur. We illustrate herewith a novel improvement in planing which was patented in Prussia in 1867, in the hope that

niture together are provided, in the device illustrated herewith, with a novel and simple tool especially adapted to such purposes. It consists of a sleeve, A, which at its lower extremity carries a cam. B. Fig. 2. and at its upper end has a handle, C. Passing through the sleeve is a rod having a screw point, D, at its lower end, and turned by the upper handle shown. Attached to a collar on the sleeve, A, is a rearward extending arm, E, the end of which is turned downward and toothed so as to engage with the surface of the joist. F is a slotted and grooved arm which is pressed by the cam against the boards when said cam is suitably revolved by the handle, C. The holding arm, E, prevents any rearward motion of the device, which is still further secured by the screw point, D, entering the wood of the joist.

The invention was patented June 8, 1875, to Mr. W. D. Clark, of Springfield, Ill., to whom inquiries for further particulars may be addressed.

To Distinguish Benzine from Benzol.


Benzol, C. H., was first discovered by Faraday in the cylinders in which coal gas was delivered to consumers in London many years ago. Much more recently, a volatile substance resembling it in several particulars was found among the products of petroleum refineries, and to this too was given the name benzol or benzine. At length the name benzol became confined to the coal tar product, while in this country the name benzine has generally been limited to the

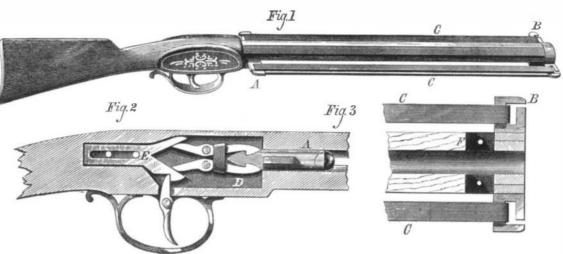

MARTIN'S TOY GUN.

the latter, since it is employed in the manufacture of aniline curved on their inner sides, and the proper amount of pressand the aniline dyes. There is great similarity in color, dor, ure is given to each by means of a rubber spring, H. Each etc., and the benzine is sometimes sold as benzol, or mixed | block and its spring is held by means of a bolt, as shown. with it. Dr. Hagar distinguishes the two by means of The tendency of the blocks, G, is to bring down the thinner


iodine. A small crystal of iodine, placed in a test tube containing the liquid to be tested and gently agitated, dissolves it from vibrating, thereby securing uniformity of thickness and imparts to benzol a violet red color; to benzine it imparts and an even surface. a raspberry red color. In a mixture of the two, the color of shaped slide, the same and the trigger back, ready for an- the solution is also a mixture of violet red and raspberry red, conflicts with the Woodbury patented pressure bar, offers, as

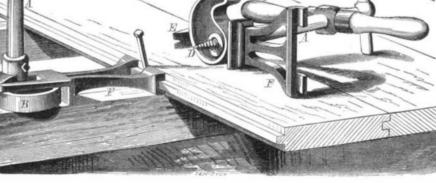

CLARKE'S FLOOR CLAMP

ventor, Mr. William H. Martin (until 1st of September next), | the latter prevailing, so that the addition of the smallest | ration of phosphate from the carbonate of soda is either imquantity of benzine to benzol can be detected in this way. A few experiments will soon enable a person to judge of the amount of adulteration.

Carpenters, cabinet makers, and others who find it fre- IMPROVED PRESSURE BLOCKS FOR PLANING MACHINES,

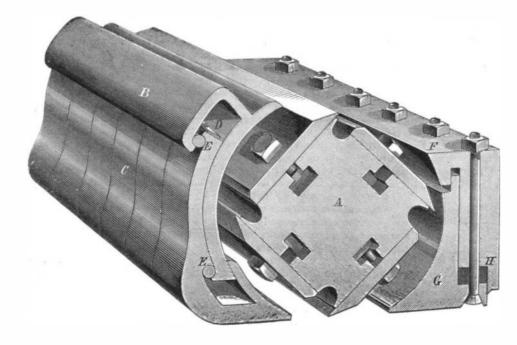

PATTERSON'S PRESSURE BLOCKS FOR PLANING MACHINES.

machines, which consists in a series of independently operating pressure blocks, arranged on lines parallel with the axis of the rotating cutter. Their object is to hold the lumber while being planed, and in so doing to take the place of the pressure bar or pressure rollers now generally employed. The advantages claimed are that the operator is enabled to feed two boards of different thicknesses at the same time, holding both alike; or he may plane one board on one side of the machine and have it held alike at both edges, thereby secur-

> amount of wear on the side of the machine as at the middle, and thus keeping the cutters and bed worn alike and even.

> At a suitable distance in front of the cutter head, A, is secured a guide, B, the inner side of which is made circular and concentric with the circle described by the cutters in their revolution. On this guide are hung the independent chip breakers or pressure blocks, C. The latter are constructed in the same curve as the guide, and are held down by the spring, D. In the guide are made suitable recesses for the reception of friction rollers, E, for the blocks to work against with an easy move ment.

> In rear of the cutter head is a crossbar, F, which holds another series of pressure blocks, .

part of a board not planed alike on both edges, and to keep

This invention, which the inventor claims in no wise

has doubtless already been noticed; a means of overcoming several difficulties peculiar to that appliance.

It was patented in the United States May 25, 1875, and also in Canada, to Mr. Chester R. Patterson, of 439 North Main street, Pittston, Pa., to whom inquiries for further particulars may be addressed.

Soda Manufacture.

Siebel proposed to make carbonate of soda by fusing together phosphate and nitrate of soda, so as to obtain at the same time nitric acid. Aside from the difficulty that the vessel, in which the fusion was made, would be rapidly destroyed, this process has no practical value, because, in the first place, a number of operations are requisite, and, in the second place, the sepa

perfect, or so expensive on a large scale, that nitric acid, as well as soda, would be much more costly than when pre pared in another way. That communication induced the au thor to publish his process for making nitric acid and caustic or carbonate of soda from Chili saltpeter at one operation,

> further experiments or the use of more suitable vessels would render this process a profitable one in indus trial chemistry, for obtaining at once, from cheap Chili niter, valuable nitric acid and caustic soda.

In 1805 and 1806 the author had numerous experiments made in his laboratory for the purpose of obtaining nitric acid and caustic soda from Chili saltpeter. It was fused and ignited with various substances like silica, alumina, oxide of zinc, and carbonate of magnesia, but all these required so high a temperature for the decomposition of the nitrate of soda that the greatest part of the li berated nitric acid was completely decomposed, and only a small portion of it was obtained. The least heat was required with carbonate of lime. The author mixed fine chalk with Chili saltpeter in nearly equi valent proportions, with a slight ex. cess of the former. The mixture was heated first in an iron retort, afterwards in large iron pans under a stone vaulted cover, until no more gas was evolved, and the mass be

came pasty and thick. The gases were conducted through a system of stone flasks containing water, and in this way at first three fourths, afterwards eleven twelfths, of the nitric acid in the saltpeter was obtained. As the common salt in the saltpeter is not decomposed by carbonate of lime, at least at the temperature employed, the acid obtained was perfectly free from chlorine. The thick sirupy mass was drawn out of the pan while still hot, and the pan charged again. The mass, which contained caustic lime and carbonate of soda, when cold, was boiled with water to obtain caustic soda, the carbonate of lime being precipitated.

Since all the soda in the nitrate of soda is obtained in the form of caustic soda, and as a rule this covers the total cost | resque in appearance. It would be very suitable for a gate | mers. The normal paraffins were chlorinated, and then con-

of the saltpeter and chalk employed, this pro cess would be a profitable one were not the costly vessels rapidly destroyed, as an eight months' experience proved, the operation often being interrupted to renew the pans.—CarlLieber.

To Make Gold and Silver Inks.

Good bright gold, silver, and bronze inks are seldom met in the market; they are almost always of a dull color, do not flow easily from the pen, and the writing remains sticky. Hence architects and artists mostly prefer to use shell gold and shell silver (Muschel-Silber), instead of the corresponding ink. The latter, however, is so much easier and safer to use that I will describe its preparation.

For gold ink it is best to employ genuine gold leaf, but owing to the expense this is seldom used; sometimes mosaic gold (sulphide of tin) or iodide of lead is employed, but almost always Dutch leaf.

Owing to the relatively low price of silver, genuine silver foil is used for silver ink, false silver foil is seldom used, and is not so good. For other metallic inks, commercial bronze powders are employed. The genuine and false foils are also sold in a finely pulverized state; they are made from the waste of the gold beaters by rubbing it in metallic sieves to an impalpable powder.

it has particles of grease and other impurities attached to it which must be removed before it can be used for ink. For this purpose the whole sheets, or the commercial bronze powder, are triturated with a little honey to a thin magma on a glass or porphyry plate with a pestle, as carefully as possible, as the beauty of the ink depends essentially on this. The finely rubbed paste is rinsed into a thin glass beaker, boiled for a long time with water containing a little alkali, frequently stirred, decanted, well washed with hot water, and dried at a gentle heat. By boiling this powder with water containing sulphuric, nitric, or hydrochloric acid, different shades can be imparted to it.

Next, a solution of 1 part of white gum arabic in 4 parts of distilled water is mixed with 1 part of potash water glass, and triturated with the requisite quantity of purified metallic powder. Gold ink will bear more liquid than silver ink, since gold covers much better; on rough paper more metal is necessary than on sized paper; on light paper more than on dark, to make the color of the ink appear equally intense.

In general 1 part of foil is enough for 3 or 4 parts of the above liquid. In preparing large quantities of ink, a low porcelain measure is used for transferring it to the small glass vessels where it is to be kept, and it must be continually and thoroug's y stirred so that it will always keep well mixed. It requires frequent stirring also when in use. It is best to mix the dry powder with the liquid immediately before using. The ink can be used with a common steel pen, and flows very well when writing slowly, but it is better to use a pencil.

I consider the use of potash water glass of great importance. It greatly increases the metallic luster on paper, pre vent its looking dead, protects the writing from being dis colored by the action of the atmosphere, and also prevents its penetrating too far into the pores of the paper, without rendering it very viscid. Although the writing of itself possesses a high metallic luster, it may be increased by gently polishing with a polishing steel. Inks made with mosaic gold, mosaic silver, iodide of lead, etc., are not nearly so peautiful.-C. H. Viedt.

HARDY AZALEAS,

These are flowers so fresh and fragrant that they ought to



be more generally grown in shrubbery borders than they are. The colors are rose, buff orange, and erange buff; and when

gine anything more beautiful. In every variety of this plant, when grown well in any deep rich soil, intermixed with rhododendrons, the different tints of yellow, red, and orange have a pleasing effect among the white, rose, and purple tints of the latter plant. Another attraction possessed by these azaleas is that the foliage becomes bright yellow and orimson in the autumn. Our illustration represents the socalled Ghent azalea, a fine specimen of the hardy class.

COTTAGE ARCHITECTURE.

The accompanying view and plans (Fig. 2), designed for a gardener's cottage, show a building, small, but very pictu vanian petroleum, to test the question of the presence of iso-



AN ORNAMENTAL COTTAGE.

In consequence of the beating between gold beater's skin, | lodge or a sea-side or summer cottage, and would look extremely well among the trees of a camp ground. The porch (with its seat) is large and roomy; the living room is of good size, well lighted by a square bay window. The kitchen is well supplied with closets. This first floor could be very much improved by adding a one-story kitchen at the rear, making the living room into a parlor, and the kitchen into a dining and sitting room; the additional cost would be very small. The second floor contains three bed rooms, very con-

> COAL KITCHEN PANTRY 12.0 X 12.0 LOSE LOBBY LIVING ROOM 10,6 X 14.0 PORCH

veniently arranged and each provided with a closet. The two downstairs rooms and the large front bed room are supplied with open fireplaces, the value of which for ventilation is so often overlooked in cheap houses; besides this, there should be ventilating tubes or shafts in the chimney sides, with registers opening from each room, thus insuring a good system of ventilation. The roof should be ventilated by openings under the projecting eaves. The estimated cost of this building is from \$1,200 to \$1,800, according to locality and style of finish.

The view and plans are taken from "Wooden and Brick Buildings," the latest and best work published by Messrs. A. J. Bicknell & Co., of 27 Warren street, New York.

Smith College.

By the endowment of a charitable lady, now deceased, a new and splendid college for the higher education of young women has lately been constructed at Northampton, Mass. The students, instead of congregating in one large boarding house, are divided into small families, residing in separate cottages, scattered about the college grounds.

The general character of the institution has been determined by its founder, whose will provides that the trustees shall furnish young women the "means and facilities for education equal to those which are afferded in our colleges to young intermixed with tender young foliage, it is difficult to ima- lish an ordinary school, but to found, in the truest sense of to the heated atmosphere of the sitting room.

that term, a college, which should give young women an education as high and thorough and complete as that which young men receive in Harvard, Yale, Amherst, and other colleges.

The college was dedicated in July last, under the presidency of Professor L. Clark Seelye, formerly of Amherst College,

On the Paraffins of Pennsylvania Petroleum.

Morgan, under Schorlemmer's direction, has made an examination of the normal hexane and heptane from Pennsyl-

> verted into olefines by treatment with alcoholic potash. These olefines were treated with cold hydrochloric acid, each of them being thereby separated into two fractions, one of which dissolved in the acid, while the other did not. The latter fractions yielded secondary alcohols when suitably treated, that from the hexane being methyl-butyl carbinol and that from the heptane being methyl-pentyl carbinol. It hence appears that the derivative olefines are normal, and have the constitution $CH_2 = CH - C_n H_2 + 2n1$. The former olefines, or those soluble in hydrochloric acid in the cold, yielded alcohols which appeared to be secondary, but which need further investigation.

> In some remarks upon this paper, Schorlemmer says that the above results do not necessarily prove the presence of a third isomeric heptane in petroleum. Heptane when treated with chlorine yields one primary, and may yield three secondary, chlorides. If the heptenes from two of these combine with hydrochloric acid in the cold, the alcohols from them would yield on oxidation ethylbutyl ketone and dipropyl ketone. These on further oxidation would vield propionic and butyric acids. Since Morgan obtained the latter, and as the acetic acid he obtained came probably from the presence in his heptane of a lower boiling isomer, it is probable that,

owing to the method he employed, the propionic acid was overlooked. To decide the question, an absolutely pure paraffin is necessary; and the author proposes to make additional experiments with hexane from mannite.

Snuff for Insects.

The so called to bacco meal, the $K\"{o}lnische\ Zeitung$ says, has been successfully used in agriculture for the destruction of noxious insects, but it has not yet been applied largely on account of its high price, which is caused by heavy import duty. The only obstacle lies in the fact that the meal might be used for the manufacture of snuff.

COMBINED PORTABLE AQUARIUM AND WARDIAN CASE,

The accompanying illustration, selected from the English Garden, represents a simple and tasteful little parlor aquarium, in which many small exotic aquatics and some of our native water weeds will grow as well as in a contrivance of greater dimensions. It consists simply of a glass vessel, similar in shape to an ordinary bell glass, but furnished with a stand, and covered either with another bell glass or an ordinary glass shade. A handful of sandy soil or gravel and a few shells at the bottom serve to hold the roots of vallisneria, aponogeton, chara, and other water plants. Soft water is best for filling the glass if it can be obtained, and one or two goldfish add brightness and life to such an arrangement, and give motion to the water. Aquatic plants, or such of them as will grow in a vase of small dimensions, very rarely produce flowers; and in order to counteract this want of brilliancy, a vase of cut flowers may be introduced, as



shown in our engraving, and they will last fresh and beautimen." The fund for the institution was not given to establish ful for a much longer time than when they are fully exposed