

Straw Thrashing in California.

The San Francisco *Alta* describes the process by which most of the wheat of California is thrashed by steam, usually the day it is cut.

The sickle is set on a level with the bottom of the lowest heads of grain, so as to take off no more of the straw than is necessary. From the platform behind the sickle the grain is carried by an endless apron or elevator into a wagon driven alongside the header; and this wagon, relieved by another at short intervals, transports the grain to the thrashing machine, which is not infrequently moved from one point of the field to another, so as to be near the header. Or, if the thrashing is to be done after the cutting, the header wagons throw their loads into piles, very different from the stacks carefully built of sheaves in those climes where rain is frequent in summer, and where the thrashing may be delayed until late in the fall. The management of the steam thrashing machine is usually the exclusive business during July, August, and September of its owner. If the machine is one of the ordinary size, he expects to thrash about 1,660 bushels—100,000 pounds—in a day; that is, if the crop is heavy and the circumstances favorable. He employs a dozen men, who are ordinarily boarded by the farmer, and he receives from 5 to 8 cents per bushel for thrashing. His total daily expenses may be \$60, and his average gross receipts twice as much per day. He gets his pay on the basis of the weight of the grain as sacked, and the more soil, gravel, cheat, and other material that should be included, the greater his profit. If he thrashes the grain directly from the header wagon, there is little opportunity to get gravel in; but if the grain is fed to the thrashing machine from a pile on the ground, many shovelfuls containing as much soil as grain are fed into the machine. The foreign buyers complain to the shippers of the gravel, and the shippers to the farmers; but the remedy does not appear near at hand, for the evil is part of a complicated system. The thrasher may have \$3,000 invested in his machine, wagons, horses, and tools needed for traveling and working; and as he hires and manages a dozen men, and has but a short season of thrashing, he must make a good profit. The business demands much skill in the control of machinery and men, and great care to prevent fires and accidents, so that the average profit is not unreasonably large. The charge for thrashing is low, because the farmers generally have preferred that the work should be done with haste rather than with care.

A NEW VELOCIPEDE.

The engraving shows an improved velocipede more especially designed for the use of children. It is propelled by the hands, and may be steered by either the feet or hands. The body of the velocipede is preferably made in the form of a horse, but it may be made in a variety of other shapes, such as that of a carriage body, a chair, etc. The rear portion of the body is supported upon two wheels placed on axles, A, which are entirely independent of each other, and carry at their inner ends spur wheels, B, which are connected by endless chains with spur wheels on two independent shafts, C, journaled in the neck of the horse, and provided with hand cranks by which they may be turned.

The forward portion of the velocipede body is supported by a caster wheel, whose shank, D, is jointed and provided with an arc-shaped slot, having a notch at each end for receiving a transverse bolt passing through the pintle of the caster wheel. By means of this device the axle of the caster wheel may be placed as shown in Fig. 1, or it may be placed directly under the pintle, as shown in Fig. 3, when the wheel will be turned in the operation of steering by means of a foot lever or tiller pivoted under the body of the horse. This lever carries a strap which passes around a drum or pulley on the pintle of the caster. When the strap is not in use it may be hooked up out of the way. The arrangement of the working parts may be seen in Fig. 2, which is a partial plan view with the figure of the horse removed.

This invention will be appreciated by the youngsters, and will make a pleasing change after using the velocipede propelled by the feet, and with this machine the arms and chest will be developed.

It will be noticed that the rear or driving wheels are driven independently, and that one may be driven faster or slower than the other to steer the machine.

This invention was recently patented by Mr. Alfred Vick, of Mount Carmel, Conn., and will be manufactured and introduced by the "American Cyclepede Co." For further information address Theo. J. Harbach, 809 Filbert street, Philadelphia, Pa.


Banana Fiber.

Mr. Thomas J. Spear, of New Orleans, has been experimenting for many years with Southern plants with a view to their utilization in the manufacture of paper. The banana, he thinks, is the most valuable, as it grows with

great rapidity, is nearly all fiber, never requires replanting after once a start has been made on a piece of ground, enriches the soil, and needs no cultivation. All that is required to do with it is to let it grow until frost, then cut and strip out the fiber. The plant grows to the height of ten or fifteen feet, and an acre planted in banana plants would yield eight or ten tons of fiber, out of which a paper equal, he thinks, to linen or hemp can be made.

IMPROVED CLOSETS.

The "complete" sanitary closet manufactured by Messrs. C. Winn & Co., Birmingham, is of a most simple and reliable character. It is made entirely of one piece of earthen-

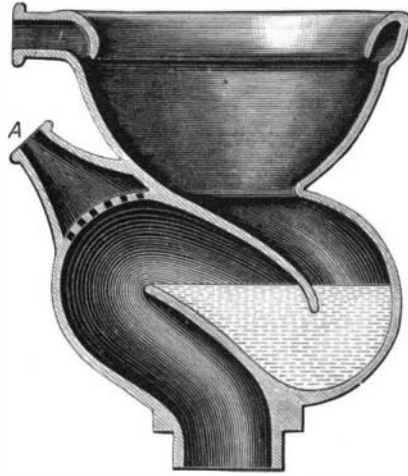


IMPROVED CLOSETS.

ware, and a reference to the accompanying sectional illustration clearly explains the arrangement. It is trapped above the floor line, is narrowest at the inlet, rendering stoppage scarcely possible. At the apex of this trap a deodorizing chamber is provided, to be filled with charcoal in connection with the ventilating outlet, A. The area of the closet for solid matter is very small, and there are no spaces where soil can in any way lodge or accumulate. The flushing apparatus, which, it will be understood, is an independent pump, having no connection with the closet except by the inlet pipe, is of the best known kind, and the force of water is concentrated where most required. After use, the whole of the water, soil, etc., passes from sight. We understand these closets are giving great satisfaction wherever fixed. This firm also make another on the same principle,

Fig. 1.



Fig. 2.

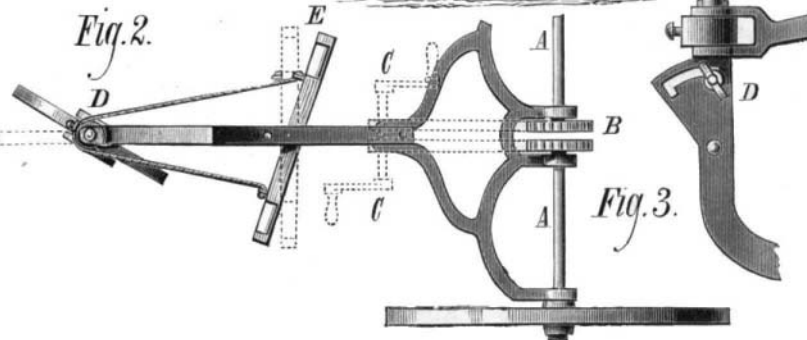

VICK'S CYCLEPEDE.

called a slop closet, having a strong grating over the outlet, which prevents the loss of anything thrown in by accident.

Give the Boys Tools.

Almost all boys are naturally mechanics. The constructive and imitative faculties are developed, in part, at a very early age. All boys are not capable of being developed into good, practical, working mechanics, but most of them show

their bent that way. There are few cases in which the boy has no competent idea of the production of a fabricated result from inorganic material, but such cases are rare. Given the proper encouragement and the means, and many boys whose mechanical aptness is allowed to run to waste, or is diverted from its natural course, would become good workmen, useful, producing members of the industrial community.

The mechanical boy ought to have a shop of his own. Let it be the attic, or an unused room, or a place in the barn or the woodshed. Give him a place and tools. Let him have a good pocket knife, gimlets, chisels, gouges, planes, cutting nippers, saws, a foot rule, and material to work. Let the boy have a chance. If he is a mechanic it will come out, and he will do himself credit. If he fails he is to follow some calling that does not demand mechanical skill.—*Boston Journal of Commerce.*

MISCELLANEOUS INVENTIONS.

An improved oil can top, which is so constructed that the oil that drips from the spout is returned into the can, has been patented by Mr. John R. Bennett, of Nunda, N. Y. The invention consists of a valve plug attached to a lever pivoted on the bottom plate of the spout, which closes a drip hole in an annular drip cup at the bottom of the spout when the lever is depressed.

An improvement in car brakes has been patented by Mr. Christian Ammarell, of East New York, N. Y. The object of the invention is to operate a car brake by a single spring and to lock the main lever of a car brake.

Mr. Stephen D. Field, of New York city, has patented a mechanical means for vibrating the tongue of a telegraph sounder or relay, and actuate the same by increase and decrease of current, or by making and breaking the circuit. The invention consists in a tongue fitted to vibrate between fixed points by the action of clockwork or other motive power, the clockwork being fitted with a brake that is operated by an electro-magnet in the line, so as to check and release the power, and thereby cause the vibration of the tongue.

An improvement in wire lathing has been patented by Mr. William Brennan, of New York city. The object of this invention is to support wire lathing in ceilings in such a manner as to leave no air spaces between the beams and the mortar; such spaces, in case of fire, serve as draught flues, and thus cause the fire to spread rapidly, and increase the difficulty of controlling the fire.

Mr. Felice Tocci, of New York city, has patented a book case that can be folded and its depth greatly lessened, thus enabling it to be packed in a much smaller space than when it is in use. It may be carried through narrow spaces where an ordinary case will not pass.

Mr. William Wilmington, of Toledo, O., has patented a car wheel chill formed with a solid body portion, and having an annular chamber located in its flange face, inclosed by an inner wall, formed in one piece with the metal inclosing the other sides of the chamber, and same shape as the adjacent contour of the flange of the wheel.

Mr. Jacob F. Weitzel, of Galveston, Tex., has patented an improvement upon that form of vegetable grater or slicer in which a tapering bucket or receptacle is made largest at the top, and is combined with a concentric and cone-shaped grater or slicer whose bases rest close to the bottom edge of the bucket, and which cone-shaped grater or slicer is arranged to revolve and act upon the fruit or vegetables which wedge themselves by gravity down into the annular space. It consists in making the cone-shaped slicer or grater in oblate or elongated form in cross section, to improve the cutting action, and in combining the conical cutter and the reversely tapering bucket with a subjacent detachable pan carrying a spider frame with a socket to receive the end of the spindle of the cone-shaped cutter.

An improvement in car coupling has been patented by Mr. Charles H. Shippee, of Wickford, R. I. The object of the invention is to furnish automatic couplings of simple construction, having but few parts, strongly and durably fitted, and adapted for connection with the couplings now in use. The inventor makes use of a coupling and drawbar formed at its outer end with a swinging hook of peculiar construction, and fitted to slide endwise upon a block attached to the king bolt of the truck.

Mr. Carl J. Renz, of Hudson, N. Y., has invented an improved portable or pocket instrument or mould for use of travelers and others for making cigarettes neatly and expeditiously. It consists of a bed piece having a lengthwise groove and two compressing lids, which are hinged at the respective sides of said groove, and one of them provided with an extension consisting of a metal plate whose curve or conformation is similar to the groove in the bed piece, so that when the lids are closed the tobacco will be compressed in the paper envelope or wrapper.

An improved shoe-blacking machine, patented by Mr.