

IMPROVED OPTOMETER.

We give an engraving of a novel instrument for measuring the focal lengths of lenses, which is capable of measuring the focus of any lens from three inches to seventy-two inches, while the length of the instrument is only thirteen inches. This is effected by the employment of a convex lens of short focus which shortens the focus of the lens under test. The instrument is in some respects similar to a camera, the object being held in the short detached tube, the lens to be tested being placed between the two tubes; the image of the object is formed on a ground glass carried by the movable tube. There is a scale on the movable tube, and when the image on the ground glass is sharp, the scale indicates the focal length of the lens.

The great utility of this instrument will be understood when it is known that scarcely any spectacle or eye glass has the correct focus marked upon it; and it is often very essential that the exact focus of a lens be known, for example, in matching a glass when its mate is broken, or in supplying spectacles which are but very little different from those already worn.

This instrument is as well adapted to testing concave as convex lenses, and it may be used by any light. It is an ornament to the showcase of a dealer, and will be found very useful by any one dealing in spectacles as well as the regular optician.

This invention was recently patented in this country, and is manufactured by Messrs. Scharpf & Adam, Smith's Arcade, Rochester, N. Y.

IMPROVEMENT IN ANIMAL SHEARS.

The shears shown in the engraving differ from ordinary sheep shears in having the blades separable from the handle. This construction admits of readily detaching the blades so that they may be ground separately, saving a great deal of time in grinding and avoiding rounding the points and corners and breaking the spring, a thing that often happens with shears of the ordinary construction.

The construction of the shears will be understood from the engraving, Fig. 1 showing the article complete, Fig. 2 being a detail view of a portion of the spring and the end of the shear blade.

The handle of the shears is made with a central spring in the usual manner. On the outer and inner ends of the arms of the handle are formed sockets to receive the shanks of the blades. The apertures of the eyes are made square and slightly tapering, and the shanks are made square and are tapered, so that when the shanks have been drawn snugly into the eyes the blades will be held firmly and rigidly. On the ends of the shanks are cut screw threads to fit wing nuts, by which the shanks can be drawn snugly into the eyes and held securely. The backs of the blades project a little beyond the shanks to form shoulders to rest against the ends of the arms of the handle, so that the backs of the blades and of the arms of the handles will be in line and will form a smooth surface.

This invention was lately patented by Messrs. C. Benavides and J. P. Arthur, of Laredo, Texas.

The Piute Census.

The statistics of the Nevada Indians were collected by Indian enumerators, whose outfit consisted of a pencil and a sheet of paper. A circle on the paper represented a wigwam or a camp. Within each circle the enumerator placed figures to represent the number of persons counted, squaws and children being represented by different signs. Chief Numana, the supervisor of the Indian count, made up his report from the paper sheets by taking a number of sticks of various lengths to denote adults and children of different sizes, notching those representing females, and sending the sticks in bundles to the Census Office.

This method, though rude, has served to furnish an accurate census of the Piutes.

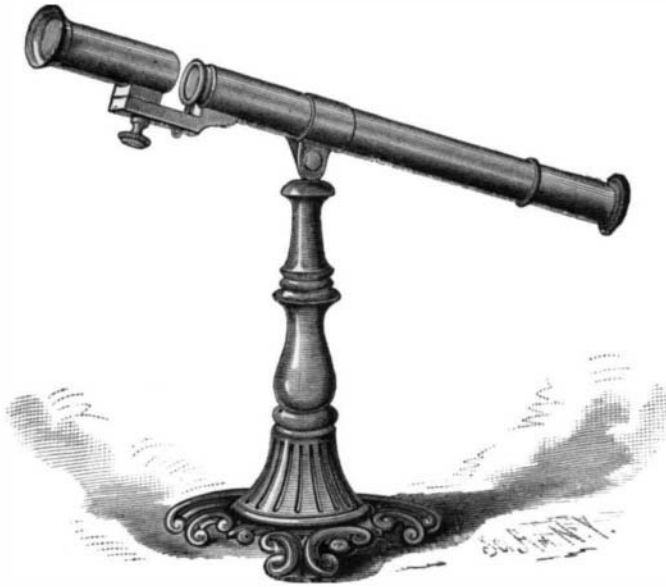
Proposed Lake Erie and Ohio River Ship Canal.

A report of surveys made by Major John M. Wilson, U. S. Engineers, describes two possible routes for a ship canal connecting Lake Erie with the Ohio River.

The first is by way of the Erie and Wabash Canal to the navigable waters of the Wabash River, which would then make the connection through to the Ohio. This would necessitate the enlargement of the entire route from Toledo to Lafayette to a width of 70 feet at surface and 52½ feet at bottom, with double locks 110 feet long, 18 feet wide, with a depth of 7 feet on the miter-sill, enabling it to pass boats of 240 tons burden, capable of carrying 8,000 bushels of grain, the amount transported by a train of 20 ordinary freight cars.

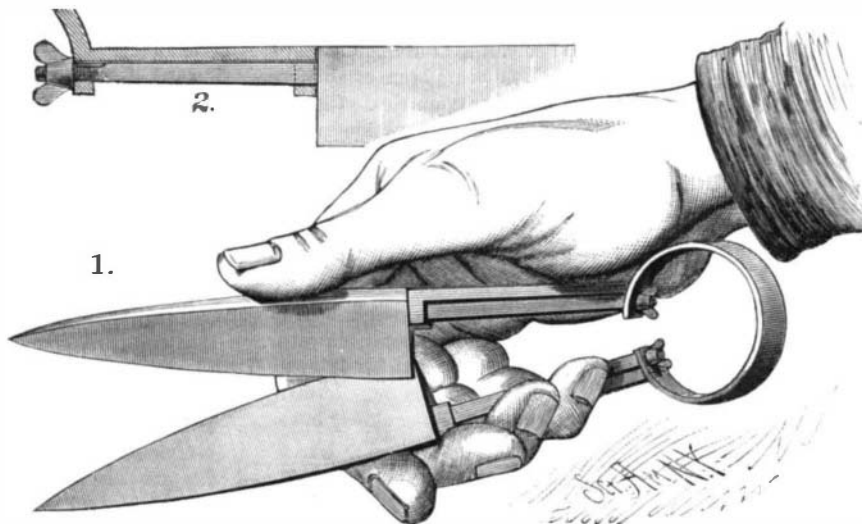
The second route is by the Miami and Erie Canal, which joins the Wabash and Erie Canal, 10½ miles south of Defiance, thus connecting Toledo and the Lake with the Ohio

River. It is proposed to enlarge the entire canal from the Ohio River to Junction City, Ohio—where it unites with the Wabash and Erie—to the dimensions of the New York and Erie Canal: the prism to be 70 feet wide at water surface, 52½ feet wide at bottom, with a depth of 7 feet; all locks

**NEW OPTOMETER.**

double, with a length of 110 feet, width of 18 feet, and a depth of 7 feet on the miter-sill; all canal structures of solid masonry, the superstructure of highway and railroad bridges of iron.

The estimated cost of the first plan from Toledo to Lafay-

**IMPROVED ANIMAL SHEARS.**

ette, Ind., is \$24,236,135.17; that of the second, from Toledo to the Ohio River at Cincinnati, is \$28,557,173.13.

IMPROVEMENT IN WATER ELEVATORS.

Although the devices that have been invented for elevating water are almost numberless, it must be admitted that there is nothing so free from objections as the old open

**IMPROVED WATER ELEVATOR.**

bucket. The old-fashioned devices entailed considerable labor in raising the filled bucket, but no one doubts that the water was sweeter and better than it would have been had it been drawn from a closed well with a pump of any kind.

Our engraving shows a water elevator embodying all that is good in the old open bucket, and having new features which avoid all objections to the windlass and bucket. In this elevator there are neither brakes nor springs, and the mechanism is so contrived that no accident can occur from the running back of the empty buckets. There are two buckets, worked by the same windlass, one ascending while the other is descending, thus insuring a perfect balance of the buckets and doubling the capacity of the elevator. Ratchets and pawls are dispensed with and noise avoided, yet the bucket is stopped automatically at any given point in its ascent or descent. The mechanism by which this is accomplished is exceedingly simple, consisting of rubber balls placed in tapering pockets on opposite sides of a wheel on the windlass shaft, and in a lever operated by the tilting bucket so as to displace one or the other of the balls and allow the empty bucket to descend, while the ball, remaining in contact with the wheel, serves as a check on the filled bucket being raised.

This elevator is adapted to a well of any depth, since its buckets are perfectly balanced. The shaft of the windlass is mounted on roller bearings, reducing the friction to a minimum.

For the sake of convenience an indicator is placed on top of the housing and connected with the lever that shifts the rubber balls, and shows which way the handle of the windlass should be turned. The size of the curb is two feet by two feet four inches.

Further information in regard to this useful invention may be obtained by addressing Mr. Samuel I. Demarest, agent, Englewood, Bergen county, N. J.

Dangers of Athletic Training.

Absolute health is attained only by the symmetrical development of all parts of the body. The man with muscles of steel and a diseased heart cannot be said to be in good health, and diseases of stomach, heart, and nervous system are often—it may even be said usually—produced by that system of development known as training. At a recent rowing match in Philadelphia, two plucky lads in contesting boats fainted as soon as the race was over. Their condition, which was apparently good, was actually abnormal, and their systems gave way because the strain which their muscles met was too great for their vital functions. Recently a similar but more serious calamity occurred at Sag Harbor. A Brooklyn lad who had taken part in a pedestrian contest, when removed from the track, fell down dead. He had prepared himself for walking and running, and depleted his vital organs to build up his limbs. When the strain came the impoverished and most important part gave way. The severe muscular exercise of college athletes has carried off many fine young men by consumption, heart disease, and other disorders, directly traceable to the absurd overwork required of their bodies. There is a limit of human endurance. That limit is reached when the body is impaired in one quarter to benefit special organs. The severity of the test by which athlete prizes are won seems designed rather to award the laurels to him who is the least healthy, because more unevenly developed, than to the really best man.—*Boston Jour. Chem.*

MISCELLANEOUS INVENTIONS.

With vulcanizers in which the required temperature is obtained by confining the steam, especially those used by dentists, the proper regulation of the temperature is of the utmost importance, and has heretofore been attended with difficulty. The usual method is to regulate the flow of gas to the steam generator by hand; but such method is unreliable. Mr. William E. Gwyer, of New York city, has patented an improved governor for vulcanizing apparatus worked by the steam pressure, by which the pressure, and consequently the temperature, is maintained at a nearly uniform point. The invention consists in a gas cock opened by a spring and closed by steam pressure, for regulation of the flow of gas.

An improved snow shovel, which is simple, light, and durable, has been patented by Mr. Henry E. Vosburgh, of Auburn, N. Y.

Mr. James H. Egan, of St. Johnsville, N. Y., has patented an improved cone attachment for stoves which is designed as an improvement on the cone attachment for which letters patent No. 229,684 were granted to the same inventor July 6, 1880, and its object is to supply air to the cone without interfering with the draught through the grate.

An improved umbrella and sunshade has been patented by Messrs. J. T. Liley and F. S. Liley, of London, England. This umbrella or sunshade is provided with means for automatically expanding or opening it when released from the catch or tip cup which retains it in the closed position.