

very justly expresses the present state of the water service at Paris, and it is a justification of the efforts that he has been incessantly making for several years, under the successive direction of Messrs. Belgrand, Alphand, and Couche, to perfect the double line of piping that constitutes one of the most interesting peculiarities of the service.


It is unnecessary to say that the two parts of this system are interdependent, so that one can supply the other in the case of a failure of either. Yet, when we examine the other kinds of water introduced into Paris, we experience a certain dread at the idea of a substitution or mixture of them in the mains.

The administration asserts that such a mixture never occurs, and we believe it; but a substitution of one of these waters for another is obligatory in certain cases. When an accident happens to the piping, or when the sources fail in summer, the Seine water is substituted for a short time for that of the Vanne in certain quarters, and after the public has been notified of it through the newspapers.

Such an occurrence, however, is extremely rare. In 1885, there were but ten days in which the spring water failed to such a degree as to make it necessary to substitute other water at certain points. We cannot help regretting, nevertheless, that the spring water mains have to ever be traversed, even momentarily, by so impure water as that of the Seine or other river.

The whole of one side of the water service exhibition hall is occupied by an immense model representing the processes employed in the distribution of water in Paris. This comprises a sidewalk raised above the floor, and which is reached by a lateral stairway. Along this sidewalk runs the public roadway, and beneath this is arranged a distributing main with which are connected a fire hydrant, a water post, and hydrants for washing and sprinkling. Visitors are thus easily enabled to obtain an idea of the way in which water is introduced for the various requirements of the public streets, for cleaning and sprinkling purposes, and for the fire service. At one point of the sidewalk is shown a sewer manhole, with a safety covering, invented by Mr. Boutillier, chief superintendent of bridges and roadways. This device serves to prevent people from falling into the sewer. It consists of a metallic ring, to which are affixed converging ribs that support a wire lattice work. By reason of its light weight (13 lb.), it can be easily carried about by one man (Fig. 3).

Such as it is, with its 1,020 miles of conduits, the piping for the water service of Paris is, as a whole, vaster in extent than any other in the entire world. London, to cite but that city alone, is supplied by nine companies, whose lines of piping are independent, so that, from this point of view, it forms nine distinct cities,

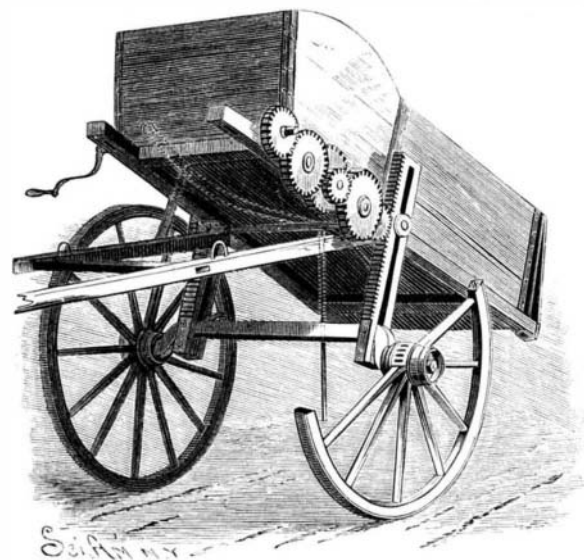

SCHALL'S IMPROVED DUMPING CART.

each of which is equal to a second rate capital only. It very naturally results that Paris is likewise the city in which it is most troublesome to discover leakages, and in which it is most difficult to prevent errors in the details of manuvering, and to find them out soon enough to remedy them in time, after they have been committed. It is important, then, to know at every moment whether all is well with the distribution, that is to say, whether the pressure is anywhere lower than it ought to be. For ascertaining this, the administration, three and a half years ago, established manometer stations, designed for facilitating the search for leakages, and for the control of the distributing manuevers.

These stations comprise a pressure gauge, affixed to a lamp post, and connected in the sewer with an apparatus consisting of two superposed cylinders of thick glass separated by a rubber diaphragm, which forms a passive partition between the ascending column and the branch that communicates with the water main. A brass cage guards the glass against external shocks, and allows of a verification, at any time, of the state of the diaphragm, which should remain horizontal as long as the apparatus is in a condition for operating normally.

As the diaphragm acts only as a partition between

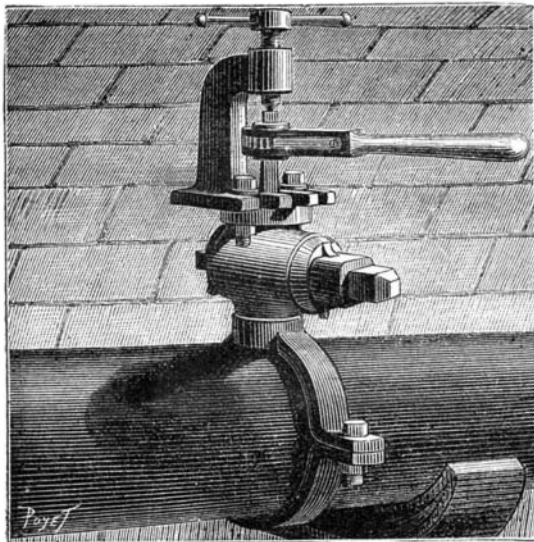


Fig. 4.—DRILL FOR BORING HOLES IN WATER MAINS.

two strata of liquid in equilibrium, it follows only the motions that correspond to those that occur in the pressure gauge tube. Such motions are necessarily almost imperceptible, and every apparent depression of the diaphragm is a sign of a leak in the branch ending at the pressure gauge, and is logically followed by an increase that confirms the necessity of an examination. The apparatus communicates, through the lamp post, with an external cast iron dial, electro-plated with copper, and protected by a wire screen, through which may be read the state of the pressure in the main. Plates in relief, forming part of the elegantly designed dial case, give the nature of the water, the number of the station, the diameter of the main, and the respective altitudes of the latter, of the ground, and of the axis of the pressure gauge (Fig. 2).

Another interesting apparatus is one that permits of boring a hole in the main under pressure, in order to form a new branch at any point, without interrupting the circulation of the water. This is shown in Fig. 4. The cock from which the new conduit is to branch is inserted in the main while the hole is being bored, and automatically as it were, and the connection is made without the loss of a drop of water. During the operation, the few iron shavings that are formed drop into the main and are carried off by the water. As may be conceived, such cocks are numerous in a city like Paris, and are still more so in the dwellings, for the various needs of daily consumption.

The water is now delivered, as per policy, either by gauge or by the meter. Paying for it at so much per cock, which was formerly so much in vogue, for domestic uses, gave rise to so many abuses that it is now abandoned, save in the case of apartments, where it is stipulated that the special cocks shall prevent a continuous flow. The various kinds of these cocks now used are shown at the exposition. Among them, there is one that is of very recent invention, and is due to Mr. H. Chameroi. This apparatus (Fig. 5) is thus put in place: The cap, H, is removed, and the piston, E, and clack valve, D, are taken out; both the valve, D, and its seat are carefully wiped, and the cock is screwed to a coupling affixed to the conduit. A glass of water is poured into the cock, in order to fill the lower chamber, M, the clack, D, is introduced, the chamber, F, is filled anew, and then the piston, D, is introduced with care up to the upper level of the cock, and the excess of water escapes through the upper orifice. Then, while the handle, L, is held back, the cap is screwed on again. This operation is indispensable in order to expel the air contained in the chamber; for without such a precaution, ram strokes would occur. The cock being charged, it suffices, in order to get water, to push the handle down. When once the flow is interrupted, the handle is raised, and then, on being depressed anew, the same volume of water will flow.

The internal mechanism operates as follows: When the handle is pushed downward, the cam repels the piece, G, which drives the upper piston, E; the water in the chamber, F, transmits this motion to the lower piston, C, which is connected with the clack, B, and the water escapes freely through the orifice, O; but the action of the spring causes the clack, B, to rise so slowly that the water in the chamber, F, finds it difficult to escape through the small clack, D, which closes the conduit, Z, more or less perfectly. If the water

takes a minute to escape from the chamber, a volume of water will pass during the same time, under the direct pressure of the conduit, through the orifices, S, O, T. In order that the same volume shall flow under all pressures, a movable tube with apertures is introduced into the orifice, S, in order to reduce the velocity of the water according to the pressure to which the cock is submitted.

In this way the water may be distributed at discretion and without control; but it is impossible for subscribers to cause a continuous flow. They can get from 14 to 18 pints of water every time that they depress the handle, and stop the flow at will by raising it; and so too, by depressing the handle slowly, they can vary the velocity of the flow, and consequently regulate the discharge. Whatever be the volume that flows, it will never be able to exceed that for which the cock has been regulated, seeing that its construction prevents any constant discharge of water from taking place, and that, too, whatever be the position of the handle.—*La Nature*.

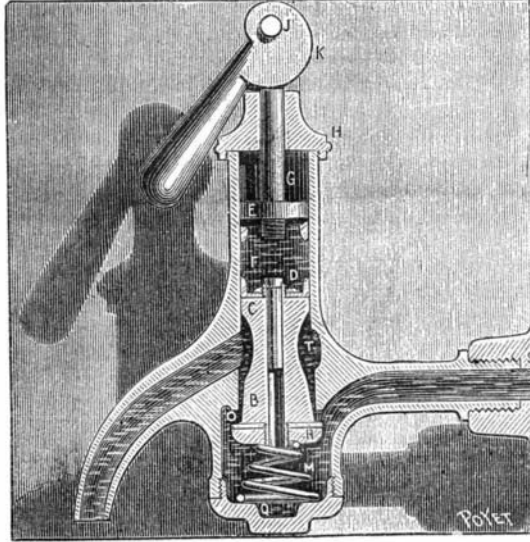



Fig. 5.—CHAMEROI'S INTERMITTENT COCK.

#### IMPROVED DUMPING CART.

The accompanying engraving represents a novel form of dumping cart, the invention of Mr. Reuben T. Schall, of Norristown, Pa. The axle is provided with two vertical racks, formed upon the forward faces of standards having longitudinal slots. Engaging with the racks are small gear wheels, carried by a transverse shaft mounted in bearings on the wagon frame. Upon one side of the frame is mounted a train of gearing, operated by means of a crank handle, and engaging with the wheel that meshes with the rack, so that when the crank is turned the gear wheels will travel up the racks, and raise the cart body and shafts. After the cart has been sufficiently elevated to permit of the dumping of its load into a chute, a properly arranged lever upon the side of the cart opposite the gearing is drawn down, and the body of the cart swung to the position shown in the engraving, the rear end being supported by a staff connected with the lever near its back end. The cart frame is provided with two studs, having disk-shaped heads, which ride within the slots in the standards, and thus guide the cart body, the disk-shaped heads fitting against the outer face of the standards. The shafts are pivotally connected to the frame, the forward parts of the side timbers of which are slotted to permit the passage of staples carried by the shafts, a bar being inserted in the staples above the frame to keep the cart from dumping.

#### CURTAIN FASTENER.

The curtain fastener herewith illustrated is the invention of Mr. Wm. Wiedemann, of Lawrence, Kan. To the base plate are pivotally connected two jaws; the inner portion of each jaw is formed with a semicir-

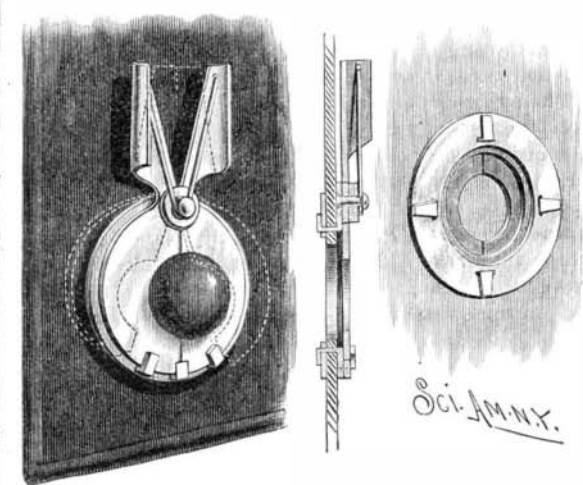

WIEDEMANN'S CURTAIN FASTENER.

cular recess and the outer portions form thumb wings, and are normally held apart by a spring. By pressing upon the thumb wings, the jaws are thrown apart to permit the head of the button to pass between them, so that when the pressure is released the jaws will close about the shank of the button and firmly hold it. In applying this fastener to a carriage or other form of curtain, ears on the base plate are forced through the curtain and passed through apertures made in a retaining ring, after which the ears are turned down to clamp the fastener to the curtain. This fastener will hold the curtain against displacement by the wind, and can be easily buttoned and unbuttoned.