

AGRICULTURAL INVENTIONS.

A harrow has been patented by Mr. George Coffman, of Spearville, Kansas. The body of the harrow is made in two sections, each consisting of a series of parallel bars, held apart by inclined transverse end braces and a straight bar, making a harrow of light draught, adjustable to unevenness of surface, and which may be utilized to carry a plow or sacks of grain to the field.

A grain drill has been patented by Mr. William Nighswonger, of Peotone, Kansas. It is so constructed that a series of colters are made to act in conjunction with a series of hoes to pulverize the ground and cut down weeds in advance of the seed depositors, the seed box having a double row of seed openings whereby the feed may be operated in opposite directions within the box to insure an even distribution of seed.

MISCELLANEOUS INVENTIONS.

A buckle has been patented by Mr. James England, of New York City. It is so made that the greater the tension, the more firmly will a clamp be pressed against the clasped end of a strap, while by pulling on the free end of the strap, slack may be taken in as desired, the buckle affording great facility for adjustment with security of fastening.

A cleaner for blackboard erasers has been patented by Mr. James S. McClung, of Pueblo, Col. The eraser has a handle adapted to fit into a box with a slotted side and with a false bottom of wire cloth, the side slot of the box having elastic lips for inclosing the handle, whereby the eraser may be cleaned without the escape of chalk dust.

A sewing machine table has been patented by Mr. Joseph Wertheim, of Frankfort-on-the-Main, Germany. The table top has in its upper surface a connected series of ramifying grooves to contain a liquid, the grooves being covered by a thin wooden plate, the object being to render the working of the machine noiseless.

A show case has been patented by Mr. James J. Kelly, of Albany, N. Y. It has a sectional cover, one part sliding over the other, and a detachable auxiliary outer bottom in which a shelf slides, a cord or chain connecting the shelf and sliding cover, whereby when the shelf is drawn out the sliding cover is raised, and *vice versa*.

A step ladder has been patented by Mr. Alfred M. Whiteley, of Brooklyn, N. Y. It is so constructed that the two hinged main limbs are capable of simultaneous expansion and contraction in an upward or downward direction, giving great stability, with increased facility for raising and lowering the ladder, and locking it at different heights.

An ore washer has been patented by Mr. Thomas Sharp, of Nashville, Tenn. It consists essentially of a water supply tank with regulating attachment, a chute with counterbalanced swinging barriers, and a means for discharging the water above the lower end of the chute, being more especially applicable for washing ores embedded in a clay matrix.

A feed trough has been patented by Mr. Alvin N. Main, of Pittsfield, Ill. It has upwardly extending pins and inclined sides having hinged bars on either upper edge, the hinged bars being provided with upwardly projecting pins, whereby animals are prevented from spilling the feed and the seed contained in the hay, clover, etc., are saved.

A neck scarf has been patented by Mr. Gustave Selowsky, of New York City. It has a band provided with a leader or tip secured to its outer extremity, the tip being of peculiar construction and of an approximate external length equal to the neck band passage, whereby a saving of material will be effected in making the band.

A portable fire escape has been patented by Messrs. George Gavin, Lawrence W. Cromer, and Frank Gilmor, of Eureka, Nevada. It consists of a casing with attached hook and carrier journaled therein, a cap bearing on the casing and compress to produce friction between the casing and carrier, and other novel features, making a strong and simple device which can be readily carried in a trunk or valise.

The construction of buildings forms the subject of a patent issued to Mr. Addison Smith, of New York City. The invention covers a form of construction for buildings on a diagonal street whereby the front of one building will not interfere with the view of another, the front entrance being at right angles to the side walls, and affording advantageous show window space.

A wrench has been patented by Mr. Walter L. Gibson, of Oviedo, Fla. The fixed jaw has a projection, and a movable jaw is pivoted to the fixed jaw, a block being formed with bearing surfaces approximately at right angles to each other, being pivoted to the fixed jaw, the parts being so arranged that if desired the device may be used as a pair of pincers or pliers.

A jersey stay has been patented by Messrs. Samuel Kramer and Jacob Levy, of New York City. It consists of a pin hook or a number of pin hooks of peculiar form fastened to the interior of the garment at its lower edge, with their prongs projecting upward and adapted to be caught in the undergarment, to prevent the jersey from working upward on the body of the wearer.

A wrench has been patented by Mr. George Gavin and Lawrence W. Cromer, of Eureka, Nevada. It has a stationary jaw with longitudinal recess and intersecting slot, a rod carrying a movable jaw working in the slot, having an outer screw-threaded end and internally screw-threaded sleeve, with collar connected to the sleeve, whereby the jaws are made to approach each other or separate.

A window screen and fixture has been patented by Mr. George H. Gould, of West Lebanon, Me. It is provided at opposite sides with deep grooves,

and has series of holes in its side bars, in combination with side strips fixed to the window frame, and pins passed into the holes to bear on the guides, with other novel features, making a screen which can be readily fitted to windows of varying widths.

A velocipede has been patented by Mr. Allen M. Stoner, of Topeka, Kansas. The rear axle is arranged to support a vehicle body, while the forward axle is connected to this body by a novel form of swinging connection, the forward axle being arranged to be driven by treadles operated by the rider of the vehicle, and so that it may be turned as desired to carry the vehicle to the right or left.

A system of bailing wells has been patented by Mr. Solomon C. Rhodes, of Bradford, Pa. This invention covers an automatic bailer discharging device, for use in connection with water, oil, or other wells, whereby any two wells of a group within a distance of six hundred to a thousand feet of each other or from the driving power may be bailed out at once, and the operation be attended to by one operative.

A machine for making upholsterer's nails has been patented by Mr. Franz J. Bergmann, of Neheim-on-the-Ruhr, Westphalia, Germany. Combined with an anvil is a pivoted lever carrying a punch, a reciprocating head and an arm connected therewith provided with a lug engaging the free end of the punch-carrying lever, with other novel features, forming an improved machine for making nails with an iron shank and a brass head.

A gauge attachment for cane shaving machines has been patented by Mr. Louis Janson, of Brooklyn, N. Y. Combined with a pair of knife disks and gears for turning them is a longitudinally moving rack bar engaging the gears, a movable block to which the rack bars are connected, and means for adjusting the block to move both bars simultaneously lengthwise, by which the knife disks are adjusted to present a new edge to the work and laterally to gauge the width of the strips.

SCIENTIFIC AMERICAN
BUILDING EDITION.

MARCH NUMBER.—(No. 29.)

TABLE OF CONTENTS.

1. Elegant plate in colors, showing perspective elevations and floor plans of a cottage of moderate cost, together with full specifications, sheet of details, etc., etc.
2. Plate in colors of a handsome suburban residence, costing about Twelve Thousand Five Hundred Dollars, with floor plans, specifications, sheet of details, etc.
3. Elevations and floor plans of two dwellings of moderate cost.
4. Perspective view and floor plans of a house for Six Thousand Dollars.
5. Floor plans and elevations of a substantial residence at Tuxedo Park.—James Brown Lord, architect.
6. Perspective and two plans of a Cape Cod cottage of moderate cost.
7. Plans and perspective of a double house, costing about Six Thousand Five Hundred Dollars.
8. Elevation and plans of an alteration of a dwelling on Long Island.
9. Sketch of a one story residence erected at Birmingham, Ala., at a cost of Four Thousand Five Hundred Dollars.
10. Floor plans and perspective view of a neat cottage for Seventeen Hundred and Fifty Dollars.
11. Plans of an English country house.
12. Sketch of a handsome double house at Cleveland, Ohio. Cost, complete, Six Thousand Dollars.
13. Illustration of a house costing Three Thousand Dollars.
14. Designs of two substantial churches, costing about Four Thousand Dollars each.
15. Elevation and floor plans of a brick residence at Newark, N. J. Cost, complete, Seven Thousand Six Hundred and Seventy-five Dollars.
16. Sketch of the hall and stairway of a luxurious English dwelling.
17. Design for a carriage house and stable. Cost, Fifteen Hundred Dollars.
18. Plan of an old plaster ceiling, South Quay, Yarmouth.
19. Architectural Suggestions.—A Stairway in the Hotel Cluny.—A Stairway in Rouen.
20. Miscellaneous Contents: Ancient Water Works.—Making the House Water-Tight.—Mahogany.—Vibration of Buildings.—Building Accidents.—The Column Vendome, Paris.—Learning to Design Buildings.—Non-Inflammable Wood.—Large Redwood Boards.—An Experiment on the Expansion of Iron in Buildings.—Ornamental Hedges.—The Acoustics of Buildings.—Suggestions on House Painting.—Right and Left in Landscape Painting.—Furniture Woods.—Range Boiler Explosion, with illustrations.—Plastering of Walls, Westminster Hall.—Notes on Bricks.—Mineral Wool.—The Jackson Ventilating Grate, illustrated.—The Spencer Hot Water Heater, illustrated.—The Alsop Furnace, illustrated.

The Scientific American Architects and Builders Edition is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages; equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural publication in the world. Sold by all newsdealers.

MUNN & CO., PUBLISHERS,
361 Broadway, New York.

Special.

"NATURE'S SWEET RESTORER."

Thrice happy is he who can fall into sweet, refreshing sleep nearly as soon as his weary head rests upon the pillow, to slumber on till rosy morn arouses him to conscious duty, just as the sweet babe, weary from constant pattering of its little feet, has closed its silken lashes and floated to the land of dreams, while its cherub form lay cradled in its mother's arms.

Not so the tortured sufferer, languishing from exhausted nerves and feverish disease. To him the bed seems as though it were filled with nettles instead of feathers. He finds no sleep either on right side or on left. The bed is uncomfortable, the clothes too heavy, the air stifling, and the pillow too low or too high. Sleep, he declares, has gone to the dogs, and he wishes the bed had too.

A mother in Eastland, Texas, in June, 1886, wrote of the benefits of the Compound Oxygen which she had received from Drs. Starkey & Palen:

"It is doing a great deal for me, too (in relief from kidney disease and neuralgia), though more slowly. I am able to resume my place as organist in church without being made so very nervous, as I have been, and am getting some good sleep every night."

A farmer, writing from Bareville, Pennsylvania, February 1, 1886, stated his case as follows:

"Age 57. Rheumatism. A year ago pain commenced in hollow of foot. Very severe in damp weather, extending to hips and shoulders and sides; so severe sometimes was not able to turn in bed. Lost 29 pounds in weight."

March 22 he submitted the following report:

"I have been taking the Compound Oxygen for rheumatism, and I have had good, comfortable sleep for six weeks, which I had not had for six months previous to taking the Compound Oxygen. I also have a good appetite, which is worth more than I paid for the Compound Oxygen."

A lady writes from Macon, Ill., May 3, 1886:

"Please to send your treatise to address below, as I think he will get a supply as soon as he knows what it will do. I feel like a new woman now. Such sweets sleep I have not had for years."

From Wilbraham, Mass., we have this report:

"My ability to sleep is quite satisfactory, *i. e.*, it has wonderfully increased. Mother thinks she has slept better since taking Compound Oxygen than she has in the same length of time for twenty years."

For full particulars of rivitalizing power of the Compound Oxygen, write to Drs. Starkey & Palen, 1629 Arch Street, Philadelphia, Pa., for one of their brochures, and it will be sent free, postage paid.

Business and Personal.

The charge for insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

Short line telephones. See illustrated adv., page 172.

Special facilities for the manufacturing of all kinds of light hardware and novelties, by contract or otherwise. Press work and stamping done on short notice. Acme B. H. Att. Co., Limited, 74 Fifth Ave., New York.

For the latest improved diamond prospecting drills, address the M. C. Bullock Mfg. Co., 138 Jackson St., Chicago, Ill.

Leather Link Belting is the most reliable for swift running machinery. For particulars write Chas. A. Schieren & Co., 47 Ferry Street, New York.

Patent foot power scroll and circular saw, mortisers, lathes. Seneca Falls Mfg. Co., 665 Water St., Seneca Falls, N. Y.

Finished wood boxes of all kinds made by F. D. Martin & Co., N. Springfield, Vt. Correspondence solicited.

Burnham's turbine wheel is sold at net price to mill owners. Catalogue free. Address York, Pa.

The Diamond Prospecting Co., 22 W. Lake St., Chicago, Ill., general agents for the Sullivan diamond prospecting drills.

Foree Bain, 76 Market St., Chicago, designer and constructor. Electrical apparatus, fine and special machinery, etc.

Nickel Plating.—Manufacturers of pure nickel anodes, pure nickel salts, polishing compositions, etc. \$100 "Little Wonder." A perfect Electro Plating Machine. Agents of the new Dip Lacquer Kristaline. Complete outfit for plating, etc. Hanson, Van Winkle & Co., Newark, N. J., and 92 and 94 Liberty St., New York.

Perforated metals of all kinds for all purposes. The Robert Aitchison Perforated Metal Co., Chicago, Ill.

The Railroad Gazette, handsomely illustrated, published weekly, at 73 Broadway, New York. Specimen copies free. Send for catalogue of railroad books.

The Knowles Steam Pump Works, 113 Federal St., Boston, and 98 Liberty St., New York, have just issued a new catalogue, in which are many new and improved forms of Pumping Machinery of the single and duplex, steam and power type. This catalogue will be mailed free of charge on application.

Link Belting and Wheels. Link Belt M. Co., Chicago. Iron Planer, Lathe, Drill, and other machine tools of modern design. New Haven Mfg. Co., New Haven, Conn.

Supplement Catalogue.—Persons in pursuit of information of any special engineering, mechanical, or scientific subject, can have catalogue of contents of the SCIENTIFIC AMERICAN SUPPLEMENT sent to them free. The SUPPLEMENT contains lengthy articles embracing the whole range of engineering, mechanics, and physical science. Address Munn & Co., Publishers, New York.

Presses and Dies. Ferracute Mach. Co., Bridgeton, N. J.

The Holly Manufacturing Co., of Lockport, N. Y., will send their pamphlet, describing water works machinery, and containing reports of tests, on application.

Curtis Pressure Regulator and Steam Trap. See p. 77.

Pedestal tenoner. All kinds woodworking machinery. C. B. Rogers & Co., Norwich, Conn.

Billings' Patent Adjustable Tap and Reamer Wrenches. Billings & Spencer Co., Hartford, Conn.

For best forges, blowers, exhausters, hand and power drills address Buffalo Forge Co., Buffalo, N. Y.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Hoisting Engines, Friction Clutch Pulleys, Cut-off Couplings. D. F. Felt & Co., 113 Liberty St., New York.

We are sole manufacturers of the Fibrous Asbestos Removable Pipe and Boiler Coverings. We make pure asbestos goods of all kinds. The Chalmers-Spence Co., 419 and 425 East 8th Street, New York.

New cutting-off tool, with off-set holder. Blades from 1-16 to 1-4 inch thick. Dwight Slate Mch. Co., Hartford, Conn.

Tight and Slack Barrel Machinery a specialty. John Greenwood & Co., Rochester, N. Y. See illus. adv., p. 23.

Catarrh Cured.

A clergyman, after years of suffering from that loathsome disease, catarrh, and vainly trying every known remedy, at last found a prescription which completely cured and saved him from death. Any sufferer from this dreadful disease sending a self-addressed stamped envelope to Prof. J. A. Lawrence, 212 East 9th St., New York, will receive the recipe free of charge.

"The Improved Greene Engine." Steam closing mechanism. Sole builders, Providence, R. I., Steam Engine Co.

Double boring machines. Double spindle shaping machines. Rollstone Machine Co., Fitchburg, Mass.

A Perfect Engine—Syracuse water motor, for driving light mach'y. Tuerk Water Meter Co., Syracuse, N. Y.

Send for new and complete catalogue of Scientific Books for sale by Munn & Co., 361 Broadway, N. Y. Free on application.

NEW BOOKS AND PUBLICATIONS.

THE WOMAN'S WORLD. From Cassell & Co., of New York and London, we have received copies of this new magazine, edited by Oscar Wilde, the apostle of personal æstheticism. It has upward of forty large octavo pages to each number, containing a variety of articles all more or less pertinent to the subject. As frontispiece in the last issue is a portrait in fac-simile of red crayon of Christina Rossetti by Dante Gabriel Rossetti, a pensive face, which from its associations with the life of the artist-poet is of peculiar interest. We also note a collection of literary and other notes by the æsthetic editor.

POCKET ATLAS OF THE WORLD. By John Bartholomew. New York: G. P. Putnam's Sons. Price \$1.

This beautiful little volume, with 42 clearly printed maps, is necessarily restricted to giving the main features of the geography of the world, but it will be found to answer the purpose in a great majority of cases where one requires an atlas for general use, and save the necessity of the more troublesome reference to a large work. It contains also a very complete index, so made that any place mentioned can be readily found on the map, with a limited amount of the most commonly required statistical matter.

DISEASES OF THE DOG. By John Henry Steel. New York: John Wiley & Sons. Pp. 287. Price \$3.50.

The author, a professor of veterinary science, has written this book as a manual of canine pathology, especially adapted for the use of veterinary practitioners and students. It aims to give a digest of such facts of anatomy, physiology, pathology, and other accessory sciences as bear on the actual details of diseases, all arranged in the form of a systematic text book. In the introduction the author says: "There is a delicacy of manipulation and a refinement in practice needed in the medical treatment of dogs which is not required so much in the larger animals; the tissues are very delicate, the nervous organization is high, while the patients can be more readily handled and controlled than the larger forms;" and although the author treats all questions from a professional standpoint, these lines indicate the spirit in which the book is written.

STAIR BUILDING IN ITS VARIOUS FORMS. Quarto. By James H. Monekton. New York: John Wiley & Sons. Price \$6.

The author, a teacher for many years of the mechanical class in the General Society of Mechanics and Tradesmen's Free Drawing School of the City of New York, here presents a practical description, with working drawings, of the general field of stair building and hand railing. The book gives the one-plane method of hand railing as applied to drawing face moulds, unfolding the center line of wreaths, and giving lengths of balusters under all wreaths. The student or apprentice will here find detail instruction in stair building, from a step ladder to expensive and difficult staircases, and the experienced stair builder and expert rail worker will find simple rules for laying out the most complicated work, while the professional architect cannot fail to find valuable suggestions in design and construction from the 74 large plates of drawings with which the volume is illustrated.

ASTRONOMY FOR AMATEURS. By J. A. Westwood Oliver. London and New York: Longmans, Green & Co. Pp. 316. Price \$2.25.

For those possessing small telescopes, and wishing to do something more than mere desultory star gazing for recreation or amusement, this volume affords an excellent practical manual. It especially advises and points out the methods of close and persistent scrutiny of individual objects or classes of objects in the heavens, either in solar, lunar, or planetary work, comet seeking, double stars, etc., according to the power of the instrument within reach of the amateur, in the hope that our sum of astronomical knowledge will be advanced by the efforts of such an army of observers as this class now includes, while the amateurs will in this way themselves receive more benefit than they would by the usual unsystematic work. A map of the moon is given, with its mountains, valleys, clefts or rills, craters, walled plains, etc., so designated that the amateur can readily find them with an instrument of quite moderate power.

CHEMISTRY, INORGANIC AND ORGANIC. By Charles L. Bloxam. Sixth Edition. Philadelphia: P. Blakiston, Son & Co. Pp. 788. Price \$4.50.

Bloxam's Chemistry has been for too long a time a recognized standard among chemists and teachers of chemistry to call for any detailed review at our hands at this time. Especial interest, however, at

taches to this edition, from the fact of the author's death, in November last, after the completion of its thorough revision, with the design of giving a more comprehensive view of the chemistry of to-day. The work has been much enlarged, and the elementary knowledge of chemistry it is so important to possess in the prosecution of many of the industries is here presented in a form to be readily comprehended by those not specially trained to such study. One of the prime recommendations of this edition of the Messrs. Blakiston is its very complete index, while the type and printing are excellent.

THE FLOUR MANUFACTURE. By Friedrich Kick. Translated by H. H. P. Powles. London: Crosby, Lockwood & Co. Price \$10.

This handsome volume, with 24 sheets of plates and 113 wood cuts, includes also a supplement by the same author, with four plates and 54 wood cuts, on recent progress in the flour manufacture. The first edition of the work was published in 1871, and it has since that period been accepted as a standard throughout Germany, and in Austria Hungary especially, where scientific milling was first brought to its present high state, of development, the author taking particular pains to minutely describe the Austrian methods of high or middlings milling, which has since been largely adopted in England and this country. The book is primarily written for millers and milling engineers, and cannot fail to be valuable alike to the young miller and the most experienced, for the author is analytical in his methods of investigation, while setting forth only what has been acknowledged to be best in mechanical practice. The plates furnish detailed illustrations of a wide variety of machines, with plans for the construction of mills and arrangement of the machinery.

HUDSON'S TABLES. Vol. II. By John R. Hudson, C.E. New York: John Wiley & Sons. Price \$1.

This is an engineer's manual for facilitating the calculation of the cubic contents of excavations and embankments, giving additional tables, and in some instances different methods of computation from those presented by the same author in the first volume, published in 1884.

The Shoe and Leather Reporter Annual for 1888 is the title of a neat octavo volume of more than 500 pages, nearly all of which are taken up by a directory of the shoe and leather trades and their collateral branches throughout the world. It is published by the paper whose name it bears, a journal which has unequalled facilities for attaining accuracy and completeness in such a volume.

Any of the above books may be purchased through this office. Send for new catalogue just published Address MUNN & Co., 361 Broadway, New York.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information, and not for publication.
References to former articles or answers should give date of paper and page or number of question.
Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all, either by letter or in this department, each must take his turn.
Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.
Scientific American Supplements referred to may be had at the office. Price 10 cents each.
Books referred to promptly supplied on receipt of price.
Minerals sent for examination should be distinctly marked or labeled.

(1) **A. W. K.** desires a harmless remedy which will prevent hair from turning prematurely gray. A. Nothing can prevent the hair from turning gray, any more than one can stop growing old. Sometimes, however, the following mixture is used, which acts for a time. Scald black tea 2 ounces with 1 gallon of boiling water, strain, and add 3 ounces glycerine, tincture cantharides 1/2 ounce, bay rum 1 quart. Mix well and perfume.

(2) **F. M. D.** asks: 1. What is used for putting on the bronzes that come in powder form? A. Copal varnish is good. 2. What for applying gold leaf? A. Gold size. Both of these articles can be purchased of any dealer in paints.

(3) **J. T. D.** asks for a comprehensive work on navigation, comprising both ordinary compass and log navigation, and also by means of sextants, etc.? A. We can supply you with Navigation and Nautical Astronomy, prepared for the use of the U. S. Naval Academy by Professor J. H. Coffin, 52 illustrations, \$3.50.

(4) **S. W.** desires a recipe for making a good cement for fixing rubber tires on bicycle wheels. A. Use a mixture of asphalt and gutta percha melted together. See formulas for cements in SCIENTIFIC AMERICAN SUPPLEMENT, No. 158.

(5) **W. W. G.** asks the relative cost of fuel for 12 horse boiler, figuring coal \$5.50 per ton, and kerosene oil 120° test at 8 cents per gallon. A. Your coal is less than 1/4 cent per pound, and the oil costs 1 1/2 cents per pound. The evaporative power of oil is 1/2 greater than coal.

(6) **W. M. F.** asks: 1. Will ordinary pig iron remelt, in ordinary foundry cupolas, stronger than the original pig? If so, why? A. In remelting iron, some of the gases that are combined or mechanically mixed with new iron are given off, making the iron more compact and stronger than in new iron or from the previous melting. 2. Very often, in tapping iron from the cupola into the reservoir, and even after the iron is lying in it or being handled, numerous sparks are thrown off quite high in the air, which burst

and fall in showers. A. The sparks are minute particles of iron thrown from the surface of the fluid metal by the liberation or bursting of gas bubbles from below the surface. They are ignited and burn by coming in contact with air in their flight. The gas bubbles may be carbonic oxide, hydrogen, or other gases, and probably some air carried into the metal by the stream of molten metal from the furnace. The nature of the gases contained in and liberated from metals in a fluid condition is a somewhat disputed point among chemists.

(7) **J. M. S.** writes: I have a razor the steel of which is quite soft. It can be quickly honed, but loses its edge with very little use. Can you suggest anything that will harden it so that it will retain its edge? A. We cannot. Razors are hardened thick and ground thin, and cannot be rehardened.

(8) **W. D. E.** asks when the circular saw was first used in America for sawing lumber. A. About 1802 such saws were first made here. They were adopted by the British Admiralty Board in 1804, having been previously used by Brunel for making ships' blocks, but circular saws were in use in 1790 and before that time for cutting the teeth of clock wheels.

(9) **F. P. H.** asks: What will prevent iron or steel which is constantly submerged in water from rusting? A. There is nothing lasting but good galvanizing. Asphalt varnish will be only a temporary protection. Boiled linseed oil and Prince's metallic paint, or red oxide of iron as a paint, well dried, make a fair preservative of iron surface under water. This is much used on ship work outside and inside.

(10) **H. R. S.** asks: About what would be the daily expense of a yacht, say one like Jay Gould's Atlanta? A. About \$110 per day and upward, apart from owner's private expense in entertaining guests and luxurious living.

(11) **W. W. P.**—Your skate runner cannot be cemented or soldered to be reliable. A skillful workman might braze the parts together with copper or brass, but such joint would be of little value.

(12) **H.**—There was an error in the diagram of the simple electric motor described in No. 11 of current volume of SCIENTIFIC AMERICAN. The

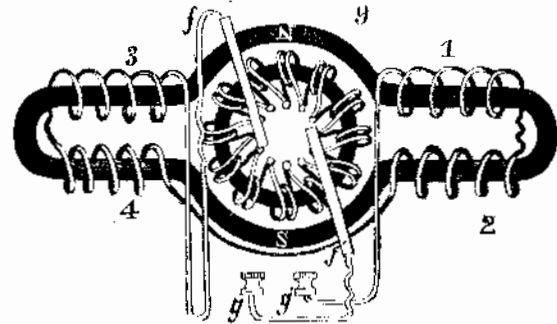


diagram is here reproduced with corrections. Complete working drawings of the motor will be given in SUPPLEMENT, No. 641.

(13) **L. W. C.** writes: I recently saw a frame maker working upon so-called bronze picture frames, by dipping the finger into a powder and rubbing it into the moulding, and after drying burnishing on certain portions with the common agate. What was the powder used and how prepared, and how was the moulding prepared to receive the bronze? A. The frames are painted with a thin coat of isinglass size or thin white glue. When dry a thin coat of gold size is applied with a camel's hair brush and dried, so as to be slightly tacky to the touch. Then rub gold bronze powder over the surface with a small piece of fur or a camel's hair brush, or the finger as you saw, which is very crude. Possibly the workman was only adding a little dry powder to facilitate the burnishing. The bronze can be purchased through the paint trade, as also the gold size, or you may make the gold size by mixing 1 part finely ground ocher, 2 parts copal varnish, 3 parts linseed oil (raw) 4 parts turpentine, 5 parts boiled linseed oil, all by weight. If too strong to flow thin, add more turpentine.

(14) **C. A. E. D.** asks: 1. What is the amount of wire in weight of primary and secondary in the induction coil described in No. 160, SCIENTIFIC AMERICAN SUPPLEMENT? A. About 2 pounds in the secondary and 1/4 pound in the primary. 2. What is required size of battery to give the full spark, the surface of carbon and zinc in inches? A. You may use as many as six bichromate cells, each having 36 square inches of opposing faces of zinc and carbon. 3. Is the spark increased by the greater quantity of tin foil in the condenser? A. As soon as sufficient tin foil is introduced, there is no use in employing more.

(15) **E. F. F.** and **H. L. W.** desire (1) a recipe for type writer, ribbon ink. A. Take vaseline of high boiling point, melt it in a water bath or slow fire, and incorporate by constant stirring as much lamp black as it will take up without becoming granular. Remove the mixture from the fire, and while it is cooling mix equal parts of petroleum benzine and rectified oil of turpentine, in which dissolve the fatty ink introduced in small portions by constant agitation. 2. The way in which carbon paper is manufactured. A. Mix lard to a paste with lamp black, rub this upon thin tissue or post paper, remove the excess with a rag, and dry the paper.

(16) **W. B. B.** asks (1) a receipt for making a copper dip such as is used in coating electric light carbons. A. They are coated electrically with a thin film of copper. Use a solution of sulphate of copper for the bath. 2. How are black lead crucibles made, and the proportions of the different ingredients used? A. They are moulded and baked, being made of poorer qualities of graphite with 10 per cent China clay, or more and poorer clay for the cheaper grades for base metals. 3. How to silver plate by battery, also kind of battery necessary, and how to make same? A. For silver plating see SUPPLEMENT No. 310, or an excellent work on the whole subject, Fontaine's Electrolysis,

which we mail for \$3.50. All kinds of batteries are described in SUPPLEMENT, Nos. 157, 158, and 159. 4. The name and address of paper wholly treating on machinery. A. We do not know of any paper treating of a wider variety of machinery than the SCIENTIFIC AMERICAN.

(17) **C. E. P.** asks: 1. Is there any metal easier to work than iron that could be used as parts of electrical apparatus to contain mercury, liable to be heated considerably by strong currents? Could not brass be used, and if the mercury corrodes it, be electroplated with nickel, or if necessary iron? Would this protect it? As the mercury expands by heat generated by strong currents, and this must be taken into calculation, can you give any rule to find the amount of expansion for say a rise of 25° or 50°, supposing temperature on starting to be about 75°, or that of an ordinary room warmed? Will the mercury evaporate or become less in time under above conditions? A. Platinum and iron are the best metals we can recommend. Brass, even if plated, will be liable from the least imperfection in the coating to be attacked by mercury. You will find tables of the coefficient of expansion of mercury given in manuals of physics. The trouble is that practically the coefficient varies with the nature of the inclosing vessel, as this also expands and contracts. Mercury slowly evaporates at summer temperatures.

(18) **M. G.** asks: 1. What would be the preservative effect of coal oil applied to wood, as pine posts in the ground dipped or soaked in petroleum? A. Coal oil would not operate as well as distillatory or tar products. It is not held in very high esteem as a preservative. 2. Is there any cheap substitute for white lead? That is, a light colored earth paint equivalent to the dark red and brown earths or mineral paint? How would white cement or lime work in oil? A. Sulphate of baryta, or the mineral barytes, is the favorite white lead substitute. Lime would decompose the oil.

(19) **W. A.** asks: What paste is used in mounting a map on canvas? A. Any good flour paste will answer, after which it is generally customary, but not necessary, to varnish the surface of the map.

(20) **T. B.** asks: 1. What is a gland? How do you pack one, and with what material? A. A gland is a flanged follower inserted in the stuffing box on the heads of engines, pumps, and other machinery that have piston rods or other sliding parts that require to be kept tight. The box is packed with various kinds of material furnished by dealers in supplies, woven or braided into yarn of square or round form, suitable in size for the open space under the gland; otherwise use twisted or braided flax or cotton, of the proper size. Wind it round the piston rod loosely, pushing into the stuffing box until it is full, then push down the gland and tighten with the screw nuts. Grease the packing before putting it in. 2. What is the difference between an automatic cut-off and a plain cut-off? A. An automatic cut-off is operated by the governor. Others are connected directly with the cam, and the governor throttles the steam. 3. What is meant by lead? A. Lead is the width of opening of a steam port for the admission of steam at the beginning of the stroke.

(21) **C. H. B.** desires a method of bleaching sponges after being used in surgical operations. A. Soak in diluted hydrochloric acid 10 or 12 hours, then wash with water and immerse in a solution of hyposulphite of soda to which a small quantity of diluted hydrochloric acid has been added.

(22) **F. W.** desires a recipe for making a paste polish that will clean and polish brass, nickel plate, copper, or any kind of metals. A. Take of oxalic acid 1 part, iron peroxide 15 parts, powdered rotten stone 20 parts, palm oil 60 parts, and vaseline 4 parts. Pulverize the oxalic acid and rouge and rotten stone, mixing thoroughly, and sift to remove all grit, then add gradually the palm oil and vaseline, incorporating thoroughly.

(23) **G.**—Engines are rated and sold by their nominal horse power, which does not designate their real or indicated horse power. The latter may be double the nominal horse power.

(24) **W. H. S.** writes: You state that carbonate of potash prevents rust on iron or steel. Will it injure the metal or not? I have never found anything that will prevent a gun from rusting in our climate, long at a time. A. It is not injurious to the metal. It is of no value for a gun that is handled or exposed to the weather, but only suited to finished work, as cutlery papered in a store.

(25) **H. B.** asks: When a cannon would shoot a ball 15 miles distance, how high would the ball go if fired up straight in the air, with the same amount of powder? A. The elevation of the gun to make a 15 mile range is necessary to a solution of this problem. Probably about 9 miles.

(26) **H. O. D.** asks: What flux can I use to obtain a clean, perfect weld in copper, and at what heat must it be worked? A. 3 parts phosphate sodium, 1 part boracic acid; pulverize and mix. Sprinkle on metal at red heat.

(27) **W. A. M.** asks whether a current water wheel could be successfully used or operated in the Missouri River. A. Current water wheels are only makeshifts, to be used when no other form can be operated. They require floats anchored or other devices to keep them at a proper immersion in all stages of the water. They are an ancient device, successful only on streams of little variation in flood level.

(28) **J. L. C.** asks: 1. Does a fatal shock of electricity produce rupture of physical tissue? A. A fatal shock of electricity is generally accompanied by some physical effect upon the animal tissues, yet there seems to be no reason why it should not kill by a purely nervous shock without any physical injury. 2. Does electricity travel upon the external surface or through the internal body of a conductor, such as a copper wire for instance? A. The entire substance of a conductor conducts electricity.

(29) **S. C.**—You cannot braze a lug on the double-barrel gun without injury to the gun. You can solder it with pure tin and make a good job. Tin the cleaned surfaces with a copper, put them together, and heat the parts until the tin melts, putting a little tin on the edge of the joint to make a perfect filling. If you are near a tinsmith, you should get him to do the tinning. Hard solder is brass, and requires a high heat to melt it.

(30) **D. H. S.** asks: If a ball falls from a certain point down on a spring, how far back will it rebound, and what is the best spring to use to throw the ball the highest? A. A rubber spring is probably the cheapest. A coiled steel spring is good, but difficult to guide without friction. A volute spring of steel, with a center pad of steel for the ball to strike upon, is probably the most efficient. The ball may return within from seven to nine tenths of the distance fallen through, according to the conditions of friction of the air, friction of impact upon the spring and perfection of contact between ball and spring.

(31) **F. B. W.** asks: 1. What is the most practical compound for safety match? A. Dip the splints in a paste composed of chlorate of potash 6 parts, sulphide of antimony 2 to 3, glue weighed dry 1. The paste for the rubbing surface is amorphous phosphorus 10 parts, oxide of manganese or sulphide of antimony 8, glue 3 to 6 weighed dry. The ingredients must be thoroughly mixed, and care must be taken not to mix the chlorate of potash in the dry state with the other materials; it should be mixed first with glue dissolved in warm water. The paste for the rubbing surface may be spread with a brush or spatula on the side of the box. 2. Is there any chemical that takes fire by blowing the breath on it? A. None that are practicable or serviceable in the ordinary way.

(32) **W. P.** asks (1) how the cheaper kinds of muclage are made by compounding starch with sulphuric acid. A. The starch is first converted into dextrine or British gum, which is then soluble in water. The method is as follows: One part of starch is acted upon by 1/4 part sulphuric acid and 2 3/4 parts water. The acid is mixed with part of the water, and the starch stirred up with the rest; the diluted acid is gradually poured upon the starch, and the mixture is kept for some time at 90° C. The dextrine is then precipitated by alcohol from the clarified solution. 2. There is an imported muclage here containing a great quantity of lime or other alkali. Can you give its formula? A. You will have to have it analyzed. We do not know its composition. 3. I find it stated that a solution of silicate of potash will make a very strongly sticking muclage. Can you tell me how the solution is made? A. Silicate of potash alone would be useless. See the article on "Water Glass," in SCIENTIFIC AMERICAN SUPPLEMENT, No. 317.

(33) **S. M. McK.** asks how to make good first class printer's inking rollers. A. Take of Cooper's best glue 8 1/2 pounds, extra sirup or New Orleans molasses 2 gallons, glycerine 1 pint, Venice turpentine 2 ounces. Steep the glue in rain water until pliant and drain it well. Then melt it, but do not cook it, the glue pot being held in an outside pot in which water is kept boiling. Next put in the sirup and boil 1/2 of an hour, stirring it occasionally, and skimming off impurities arising to the surface. Add the glycerine and turpentine a few minutes before removing from the fire and pour slowly. Reduce or increase the glue as the weather becomes colder or warmer.

TO INVENTORS.

An experience of forty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequalled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

March 6, 1888,

AND EACH HEARING THAT DATE.

[See note at end of list about copies of these patents.]

Abacus, Clark & Wren.....	378,866
Advertising apparatus, A. Duboce.....	379,106
Alarm. See Burglar alarm. Fire alarm.	
Animal hitching device, J. Coyle.....	379,103
Animal trap, Page & Hardeman.....	378,973
Animal trap, Walker & Allsopp.....	379,087
Antidote, J. T. Smith.....	379,183
Axle, anti-friction, M. Ryan.....	378,978
Bag of satchel frame lock, A. Goertz.....	379,158
Bale tie, J. R. Davis.....	378,874
Baling press, J. Garman.....	379,156
Baling press, J. M. Taylor.....	379,185
Bar. See Splice bar.	
Basting machine, T. C. Robinson.....	378,906
Bath. See Cabinet bath.	
Battery. See Carbon battery.	
Bearing, propeller shaft, J. Richardson.....	378,975
Bed bottom, spring, J. D. Stuart.....	379,138
Bell, A. & A. Iske.....	379,114
Bell, door mat, A. Iske.....	378,982
Belt tightener, F. Leininger.....	379,116
Bench. See Wash bench.	
Bench dog, F. Larson.....	378,890
Bin, E. T. Hunter.....	379,166
Binders, tension for self, W. H. Stine.....	379,063
Bit. See Bridle bit.	
Blacking box holder, G. P. Cragin.....	379,164
Blasting, friction primer for, A. F. Andrews.....	379,147
Blind stop, P. M. Miesner.....	379,120